


MODEL P350

FORM AND FIT REPLACEMENT FOR THE MOORE PRODUCTS 350 SERIES SINGLE AND DUAL BARGRAPH

- Black Anodized 6061-T6 Aluminum Machined Bezel
- Single or Dual Tri-color Bargraph with 51 or 101 Segments
- 4 (0.3" Tall) Digits with Decimal Points in Red, Amber or Green
- Choice of Power Input, 9-36VDC or 90-265VAC/110-370VDC
- DC and RMS Analog Inputs with support for Strain-Gage, RTD, Thermocouple, Potentiometer, Volts and Amps
- 5, 10, 12, 24VDC or 10uA to 1.5mADC Programmable Excitation
- Isolated ModBus, USB, RS232C or RS485 communications with dual RJ45-8 jack for simplified installation wiring
- 2 piece pluggable screw connectors for all Signal and Power lines
- Plastic Acrylic front plate with anti-reflective coating
- 100% True redundant design
- Conformal Coated Boards

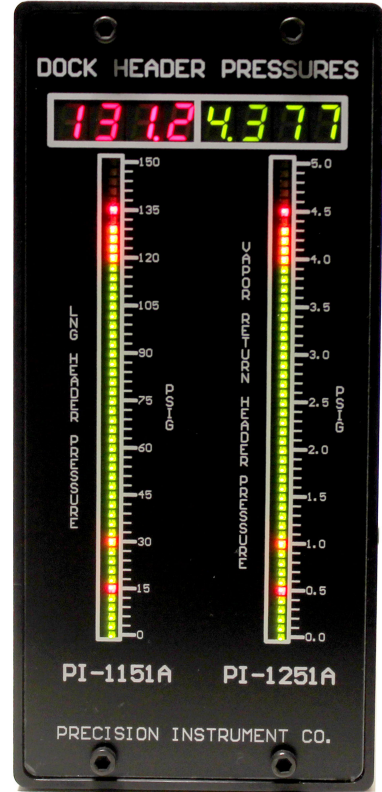

ORDERING INFORMATION

P350- A B C - D E - F G H I

A Display Style

Single 51 Segment Bar and 4 Digit Numeric0
 Single 101 Segment Bar and 4 Digit Numeric.....1
 Dual 51 Segment Bar and 4 Digit Numeric2
 Dual 101 Segment Bar and 4 Digit Numeric.....3

B Temperature Range

Standard 0-60C.....0
 Extended -40 to +85C.....E
 Special.....S

C Power Input

90-265VAC/110-370VDC.....0
 9-36VDC.....1
 Special.....S

D Communications

RS232C.....232
 RS485.....485
 USB Communication.....USB
 ModBus RTU.....MOD

E Analog Input (See note 1)

Not required.....0
 DC Volts and Amps, 1 Channel.....DC1
 DC Volts and Amps, 2 Channel.....DC2
 RMS Volts and Amps, 1 Channel.....RMS1
 RMS Volts and Amps, 2 Channel.....RMS2

F Relay Output

Not required.....0
 4 each 5 amp relays.....1
 Dual MIL-PRF-28750 Solid State Relays...2

G Analog output

Not required.....0
 Single channel.....1
 Dual Channel.....2

H Panel Mounting

Front Panel Mounting.....0
 Rear Panel Mounting.....1

I External Intensity Control

Not required.....(Leave Field Blank)
 PWM, TTL Level Signal.....P
 Voltage Input Intensity Control.....V

Part Number Example

P350-000-232DC1-111 calls for a single 51 segment tri-color bargraph display with a 4 digit numeric, standard 0-60 deg C operating temperature range, AC power input, single DC analog input, 4 relay output, single analog output and rear panel mounting hardware. Intensity is controlled through the serial port.

Note 1:

DC analog inputs support ranges from mVDC to 300VDC and from 0.01mADC to 3 AMPS DC (including 1-5VDC, 4-20mADC) as well as RTD Thermocouple and Strain-Gage, Excitation is standard. RMS inputs only support True RMS with levels up to 300V and 3 AMPS RMS.

E-MAIL:sales@PrecisionInstrument.com
 http://www.PrecisionInstrument.com
 Ph 480.980.2586

PRECISION
INSTRUMENT COMPANY
 7212 E. River Canyon Way
 Tucson, Az. 85750 USA

**MADE
 IN
 USA**



SPECIFICATIONS

Power Input

- 5 Watts Maximum per Channel
- 9-36VDC, Isolated to 1500VDC, UL Listed
- 90-265VAC or 110-370VDC, Isolated to 3000VDC, UL Listed
- External fuse should be installed, Rated at 4 Amps

Environmental

- Operating Temp 0 to 60 Degrees C Standard
- Operating Temp -40 to 85 Degrees C Optional
- Storage Temp -55 to 95 Degrees C
- Humidity 5% to 95% Non-Condensing

Analog Input (Typical at 25C, per channel)

- 24 BIT Low Noise Delta-Sigma A/D converter
- ANSI C39.1 standard Field selectable inputs support mADC, mVDC, ADC, VDC, RTD, Strain-Gage and Thermocouples. Input impedance is 1 Meg ohm minimum for voltage inputs
- Field selectable Excitation of 5V, 10V, 12V or 24VDC with 50mA source current as well as a constant current source up to 1.5mADC with 2VDC of maximum compliance voltage
- Isolation 1500 VDC to all other I/O
- Accuracy 0.05% +/- 2 counts for DC voltage or current
- Accuracy 0.2 deg C for RTD (10 ohm copper 0.00427, pt100 0.00385 and 0.00392, pt1000 0.00385, 120 ohm nickel 0.00672)
- Accuracy 0.8 deg C for Thermocouple inputs
- Linearity 0.01%
- Accuracy 0.1% +/- 2 counts for AC voltage or current, Crest Factor of 1
- Drift Approximately +/- 100 ppm per degree C from -40 to +85C
- Concurrent 50Hz and 60Hz noise rejection
- Front end Instrumentation Amplifier offers best noise immunity
- Programmable gain up to 128 for those really small signals
- NMRR, PSRR and CMRR Attenuation 100dB minimum
- Internal Noise 1.5mVRMS maximum
- Exclusive Internal Health subroutines monitor A/D performance as well as Sensor open or short conditions
- Programmable sampling rate and smart filtering
- User programmable 9th order Polynomial and 25 point X-Y table Linearization
- Thermocouple Cold Junction Compensation accuracy +/- 0.5C
- Protected from external Transients to ANSI/IEEE C37.90.1

Analog Output

- 16 BIT Low Noise Monotonic D/A Converter
- Isolation 1500 VDC to all other I/O
- Accuracy 0.05%
- Linearity 0.08%
- Programmable voltage and current output
- -10V to +10V and 0-24mADC (and anything in between)
- Output can be set for non-linear function using a 25 point user definable X-Y table
- 10mA drive current in Voltage mode, 22VDC sourcing Excitation in current mode
- Protected from external Transients to ANSI/IEEE C37.90.1

Relay Outputs

- 4 Relays, Normally Open (Form A)
- Rated to 5A at 250VAC / 30VDC Resistive
- Programmable hysteresis
- Can be set for normally closed or open in software
- 300,000 cycle life rating at 2 amps
- Dielectric strength between coil and contacts 2000VAC/60Hz
- Surge Withstand rated to 6000VAC for 50uSec
- MOV's across all contacts for protection

MIL-PRF-28750 Solid State Relay Outputs

- Tested to MIL-PRF-28750 per DESC 90091-004
- Rated to 400mA at 60VDC maximum
- Programmable hysteresis
- Can be set for normally closed or open in software
- internally fused with PTCC rated 400mA hold, 800mA trip
- Dielectric strength 1000VAC between input and output
- Surge Withstand rated to 600VDC for 50uSec
- MOV's across all contacts for protection

Display

- 4 Full LED Digits with Decimal Point 8.8.8.8.
- Display Range: -1999 to 9999
- Choice of Red, Green or Amber Color
- Superb Visibility 7 Segment 0.30" High LEDs
- 51 or 101 Segment Tri-Color LED Bargraph
- Face Plate: Plastic Acrylic with non-reflective coating,
- Front Panel servicable scale plates
- Front or Rear panel mounting

Screw Connections

- 2 piece screw connectors for power, signal I/O and relays
- 3.5mm spacing between terminals, accepts AWG# 16-26
- Connectors rated to 10 amps, 300VAC
- 2.5KV Withstand between terminals
- UL, CSA and VDE approved

Serial Communications

- Dual RJ45-8 connectors for simplified wiring
- ModBus RTU over serial RS485, USB, RS232C or RS485
- 1/8th unit load allows up to 256 nodes on the RS485 bus
- 8 data bits, no parity, 1 stop bit
- Baud rates from 1200 to 38400
- Can be set as a silent monitor or to echo incoming commands out its transmit line
- ESD protected to +/-25KV using the human body model
- Transient protected to ANSI/IEEE C37.90.1
- Isolation 1500 VDC to all other I/O

EMI Characteristics (Pending qualification)

**** 9-36VDC power input version****

- Radiated Emissions EN55022 Class B
- Radiated Susceptibility EN61000-4-3 Criteria A;10V/m
- Conducted Emissions EN55022 class B
- Conducted Susceptibility EN61000-4-6 Criteria A; 3VRMS
- EFT ; EN61000-4-4 +/- 4KV
- Surge ; EN61000-4-5 to +/- 2KV
- ESD ; EN61000-4-2 Criteria B +/- 4KV

POWER ON SEQUENCE

Power on


Perform lamp test (all segments on) and read eeprom data/checksum, compare. If good then use stored settings. If not good, retry read up to 3 times to insure corruption

After 4 unsuccessful reads force unit to default mode CA=001, CB=9600, CI=100, mode PI bus, CR=OFF, CT=0 then display Err1 on numeric LED's. For the Bargraph settings, DT=1, DP=3, BM=E, BS=0, BE=0.1, BC=A, BC=N, BA=OFF, BO=D, AC=N, ACn=A for all four alarms and A1-A4 values are all set to 0.


If checksum match is successful, turn on all DP's to indicate a power on state. Note this will be affected by the CT command if no data is received within the timeout period

MECHANICAL


All dimensions in Inches [mm]

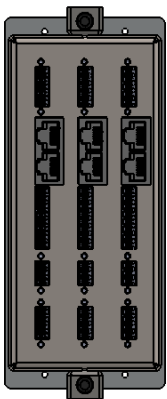


REAR VIEW

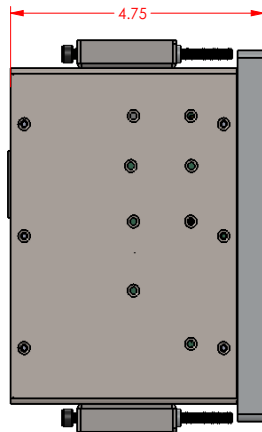

SIDE VIEW

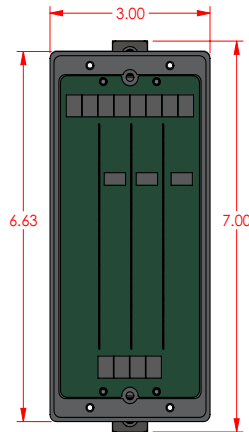

FRONT VIEW

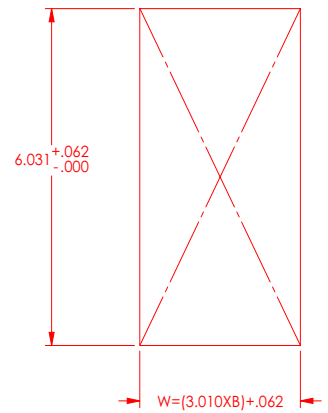

PANEL CUTOUT

